


KOMATSU



Mini-Excavator **PC30MR-3**

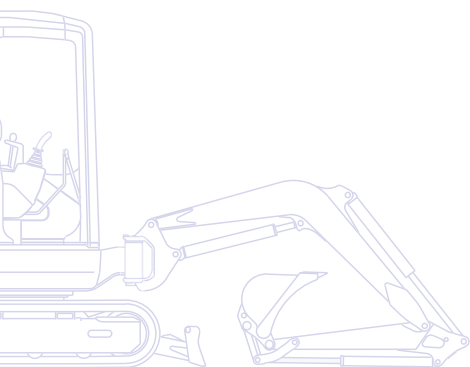


ENGINE POWER
22,0 kW / 29,5 HP @ 2.400 rpm

OPERATING WEIGHT
3.140 - 3.400 kg

BUCKET CAPACITY
0,035 - 0,13 m³

Dimensions & Working Range

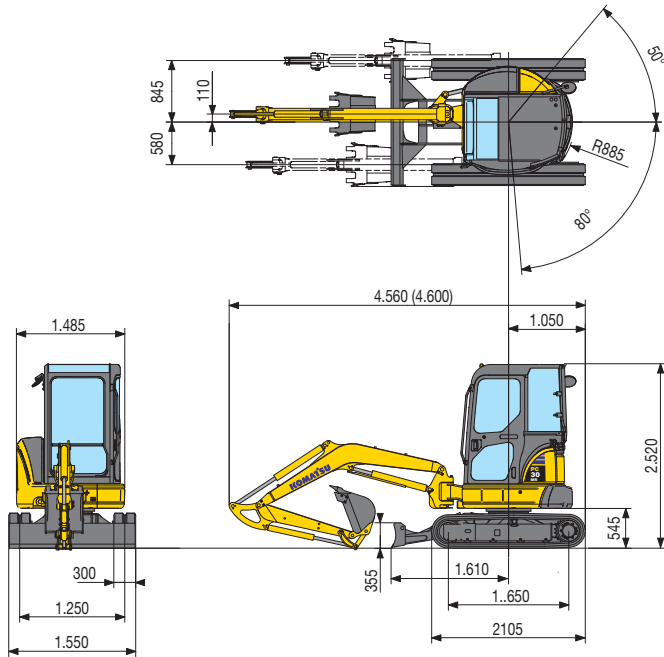


BUCKET RANGE

Width mm	Capacity m ³ (ISO 7451)	Weight kg	No. of teeth
300	0,035	55	2
400	0,07	65	3
500	0,095	80	4
600	0,12	90	5
650	0,13	95	5

Cab, rubber shoes, blade down

A - Distance from machine's center B - Height at bucket pin

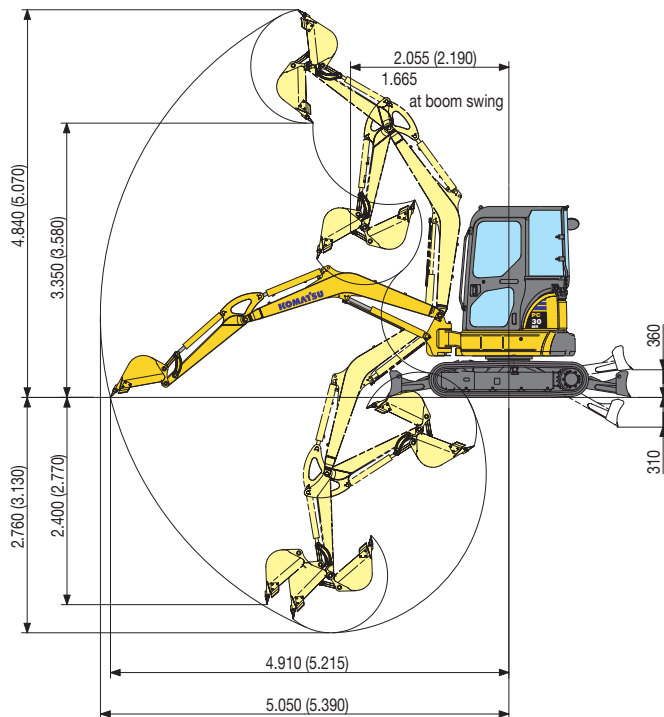

ARM LENGTH 1.240 mm

A	2 m		3 m		4 m		Max. outreach	
	Front	360°	Front	360°	Front	360°	Front	360°
4 m	-	-	-	-	-	-	(*)920	580
3 m	-	-	(*)795	470	-	-	(*)825	320
2 m	-	-	(*)1.005	455	(*)835	275	(*)825	250
1 m	-	-	(*)1.325	420	(*)920	265	(*)845	230
0 m	(*)2.670	745	(*)1.445	400	(*)930	260	(*)875	245
-1 m	(*)2.155	760	(*)1.255	405	-	-	(*)885	305
-2 m	-	-	-	-	-	-	(*)700	610

Unit: kg

ARM LENGTH 1.610 mm

A	2 m		2,5 m		3 m		Max. outreach	
	Front	360°	Front	360°	Front	360°	Front	360°
4 m	-	-	(*)700	480	-	-	(*)740	425
3 m	-	-	-	-	(*)710	285	(*)715	275
2 m	-	-	(*)845	470	(*)750	285	(*)730	225
1 m	-	-	(*)1.210	435	(*)870	270	(*)760	210
0 m	(*)2.850	745	(*)1.435	405	(*)945	260	(*)795	215
-1 m	(*)2.490	750	(*)1.370	400	(*)835	260	(*)835	260
-2 m	(*)1.575	780	-	-	-	-	(*)825	415

Unit: kg

NOTE:
Ratings are based on ISO standard 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Excavators used in object handling operations must comply with the related local regulations and must be equipped with hose burst valves (boom & arm) and an overload warning device in compliance with EN474-5.
- The values marked with an asterisk (*) are limited by the hydraulic capacities.
- Calculations are based on the machine resting on a uniform and firm surface.
- The lifting point is a hypothetical hook placed behind the bucket.